# Technical Data Sheet



## FM2400

Flush Mounted Fan Heater


White Finish





#### **Dimensions**

Depth Width Height

93mm 381mm 434mm



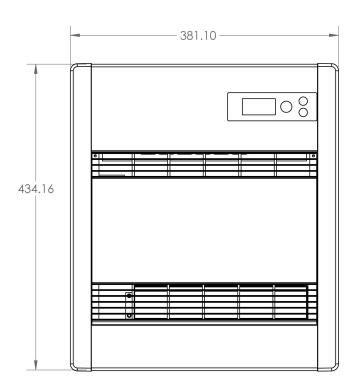

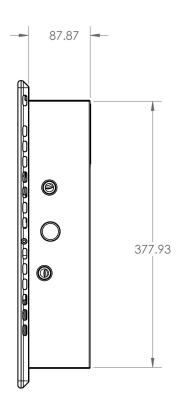

## **Specifications**

6.23 Weight White Colour

Housing material White powder

coated steel,

Extruded Aluminium

Wattage: 2200-2400 Watts

### **Approval**

AS/NZS 60335.2.30:2009 + A1

#### **Features**

- Powerful, Quiet Tangential Fan
- Fits Into Existing Cut Out for Skope 981E
- Optional Timer function
- Electronic Control
- 3 year extended warranty

## Technical Data Sheet

#### **Product Use**

The FM2400 is used to quickly heat an area

Typical applications:

- Hallways
- Motel rooms
- Hospital rooms
- Classrooms
- Offices

#### **Environmental Conditions**

Operation to IEC 721-3-3
Climatic conditions class 3K5
Temperature 0...+50°C
Humidity <95% r.h.

### **Standards**

Test standards AS/NZS 60335.2.30:2009 + A1

ERAC 000114

EMC Compliance This is a Level One product

with an C frame motor that has a very low risk of causing

**EMC Interference** 

### **Minimum Mounting Distances**

## **Ordering**

When ordering please give name and type,

Reference FM2400

Barcode 9420004902475

#### **Technical Data**

Wiring Permanent
Power Supply 230 VAC
Supply Line Fusing max. 10A
For Solid Wires 2 x 1.5mm²

Motor 230-240VAC 50Hz

0.3Amp

Motor Insulation Class B

Motor Protection Thermal Fuse
Total Product Wattage 2200-2400Watts

Installed DB rating at 1.5m 45DB